



Picture for reference only

Power Generator

FD 35 C-Q

Article: 48759

Code: F.0035.4.CZ-Q2171T190-02

Main Features

- Electronic voltage regulation $\pm 1\%$
- Low disturbance level THD $< 3\%$
- Alternator short circuit capacity 300% 10s I_n
- Class H insulation
- Protection index IP23
- Performance class G2 (acc. ISO 8528-5)
- Ready to load just after start
- AMF and MRS functionality and protection
- Autonomy 26,7 h with 75 % load

General Data

Maximum power ESP	38,0 kVA / 30,0 kW
Nominal power PRP	34,0 kVA / 27,0 kW
Nominal Current PRP	50,0 A
Frequency	50 Hz
Voltage	400 V
Emission standard	non emission
Fuel	Diesel (EN 590)
Fuel tank capacity	190 l
Fuel consumption @ 50% / 75% / 100% / 110% PRP	4,5 / 6,4 / 8,7 / 10,4 l/h
Autonomy @ 75% / 100% load	26,7 / 19,6 h
Weight without fuel	~925 kg
Dimensions L x W x H	2170 x 1000 x 1300 mm
Guaranteed noise power L_{wa}	96 dBA
Acoustic pressure @ 7m L_{pa}	~65 dBA

Main Components & Equipment

- Cummins X2.5G2 engine
- Linz PRO18S B/4 alternator
- Brushless alternator
- Electronic AVR HVR-11
- ComAp IL3-AMF25 Controller
- Schneider Z50/4 type generator circuit breaker
- GCB shunt release coil
- Linear automatic battery charger
- Engine heater
- Mechanical speed governor
- Fuel system mechanical pump
- Welded frame with 190 l fuel tank, spill containment and noise insulation
- Two fuel inlets
- Four lifting eyes
- Extended forklift skids for easy attachment to the ground

For details see page 3

Definitions

Nominal Power PRP:

Prime power available in variable load application in accordance with ISO 8528, 10% overload capacity is available for a period of 1 hour within a 12-hour period of operation. Variable load should not exceed a 70% average of the Prime Power rating during 250h of operation.

Maximum power ESP:

Standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, average power consumption should not exceed 80% ESP. Limited to 250h of operation per year.

Norms and Directives

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- ISO 8528-1/2018, ISO 8528-5/2022
- ISO 8528-13:2016
- IEC 60204-1

Contact data

FOGO Sp. z o.o.

Święciechowska 36, 64-115 Wilkowice
agregaty@fogo.pl, www.fogo.pl



Power Generator FD 35 C-Q

Article: 48759
Code: F.0035.4.CZ-Q2171T190-02

Engine

Manufacturer	Cummins
Type	X3.3G1
Made in	India
Engine power	31,0 kW
Emission standard	non emission
Rotation per minute	1500 rpm
Engine governor	mechanical
Governor class	G2 (ISO 8528-5)
Displacement	3,3 l
No of cylinder	4
Fuel system	Mechanical pump
Electrical system	12V V
Cooling system capacity	11,0 l
Oil pan capacity	8,0 l
Fuel type	Diesel (EN 590)


Alternator

Manufacturer	Linz
Type	PRO18M D/4
Made in	Italy
Nominal Voltage	400 V
Nominal power factor (cos φ)	0,8
Ambient temperature, altitude	40 °C, 1000 m a.s.l.
Nominal Power	35,0 kVA
Protection index	IP 23
No of bearing	Single bearing
Coupling	Direct
Technology	Brushless
Short circuit maintaining capacity	300% 10s
Efficiency	88,6 %
Insulation class	H
Total harmonic content THD	<3 %
Reactance Xd"	7 %
Voltage regulator type	AVR HVR-11
Voltage measurement	1 phase
Voltage accuracy	+/- 1 %
AVR supply system	auxiliary winding

Controller

- Controller type: ComAp IntelliLite AMF 25
- Support of Dual AMF/MRS applications
- Direct communication with EFI engines
- Total remote monitoring and control
- Intuitive operator interface, adjustable Main Screen
- Real time clock
- Comprehensive history log with up to 350 events
- 3 phase true RMS current and voltage measurement
- Both mains and generator voltage detection
- Active/Reactive Power and Power Factor per phase measurement
- Run Hours counter with source selector
- 3 maintenance timers (counting even under zero)
- Multipurpose flexible timers (also for rental)
- Battery voltage measurement
- Complete engine and alternator protection
- CAN modules support
- USB port on-board
- 2 slots for plug-in modules
- Plug-in module concept for more capabilities (RS232, RS485, Ethernet, GPRS, 4G/LTE, Modbus, SNMP, emails, SMS, I/Os)
- Cloud-based monitoring and control via WebSupervisor (optional module required)
- Geofencing and tracking via WebSupervisor (optional module required)
- Control and monitoring over SMS (GSM module required)
- 3 levels of password protection
- In-built PLC, complemented with a monitoring/debugging tool, for additional functionality, if required
- Spare inputs and outputs available by default: binary input – 2, binary output – 1, analogue input – 1,
- A version for low temperature is also available



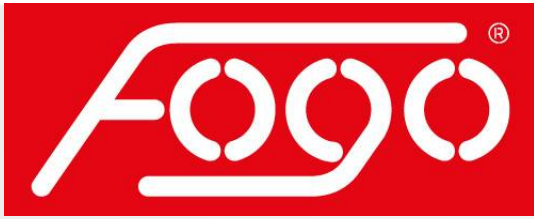

Power Generator FD 35 C-Q

Article: 48759

Code: F.0035.4.CZ-Q2171T190-02

Standard equipment

- Cummins X3.3G1 engine
- Oil pressure sensor
- Engine high temperature sensor
- Engine preheating with thermostat
- Engine oil Titan Cargo 15W40
- Fuel filter with water separator
- Coolant Fuchs Maintain Fricofin DP
- Coolant inlet outside, on the top of the canopy
- Starting batteries 100 Ah
- Linear automatic battery charger
- Linz PRO18M B/4 alternator
- Electronic AVR HVR-11
- GCB Schneider Z50/4
- GCB shunt release coil
- ComAp IL3-AMF25 controller
- Acoustic alarm
- Emergency stop button
- Silenced canopy, RAL 7024
- Fuel tank integrated with a frame and spill containment
- Two fuel inlets inside the canopy
- Fuel level indicator
- Engine and alternator anti vibration mounts
- Exhaust silencer with compensator
- Lifting eyes

Optional equipment

- Electronic engine speed governor
- Oil draining hand pump
- Battery disconnecter
- Power Lock type power output
- Power sockets box SOM 205
- Transfer switch controlled by generator controller
- Transfer switch with ATS controller
- ATS accessories for outdoor application
- GPRS communication card
- Ethernet card
- RS 485, RS 232 card
- Remote display
- Fuel inlet outside of the canopy with lock
- Generator spill containment level detector
- External, double wall fuel tank 1 000 – 10 000 l
- Fuel tank filling pump and shut-off valve

Maintenance guidelines

Fuel filters replacement	500 h / 6 MTH
Oil replacement	250 h / 6 MTH
Oil filters replacement	250 h / 6 MTH
Coolant replacement	2000 h / 2 years
Air filter replacement	1000 h
Battery replacement	2 years
Electrical installation	According to local requirements, at least once per year

Installation guidelines

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 5x10 mm ²
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm ²
Exhaust pipe min diameter (max. 7 m, 4 bends)	
Exhaust pipe min diameter (max. 15 m, 4 bends)	

*For additional cable connection with FOGO ATS see ATS wiring diagram

Warranty

Continuous operation generators	12 months up to 1000 working hours
--	------------------------------------